


Opto De-esser for the 500 Series Format

- Identical to the De-esser in the award-winning Quartet Recording Channel
- Opto-Inductive notch filter using our proprietary fast opto cell.
- Highly selective inductive detector
- Class A solid-state signal path

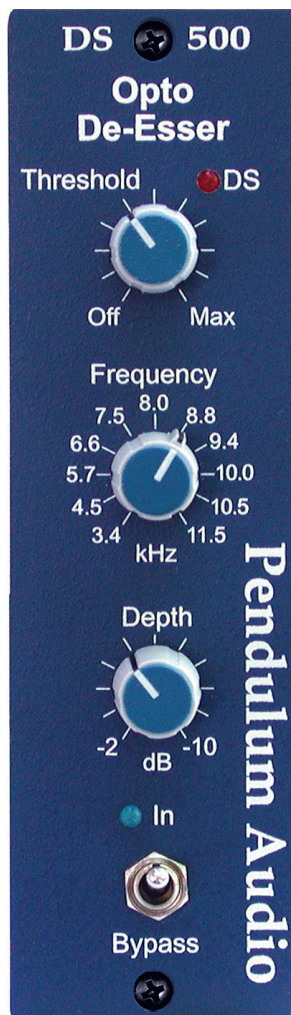

Actual Size

Back in 2001, while designing the Quartet Tube Recording Channel, I decided that it needed a de-esser as one of the four elements. Though I'd never bothered to look into how they operate – much less built one myself – I blindly went off and started tinkering. Attempts at de-essing via the sidechain of a compressor to pull down the amplitude of the "s" worked ok, but did not sound natural to my ears or leave enough of the "s" to make it recognizable.

So, I decided to try using the fast opto cell from the OCL-2 as part of a triggerable LC notch filter, which covers a specific range of fundamental frequency where the "s" is most annoying. By varying the depth and the bandwidth of the notch, I discovered that there is a sweet spot where the "s" is recognizable, but not splashy. Because the sweet spot is often singer-dependent, I added a depth control to allow the user to determine how much of the "s" to leave in. Owners of the Quartet often praised the de-esser, and found it effective in many other applications, including removing finger squeaks in acoustic guitar tracks, and "wisp" sounds on electric bass.

Ten years (and many requests) later, I've been convinced to put out the de-esser in a stand-alone 500 series card. It is identical to the one in the Quartet, but implemented around a unity-gain class A solid-state line stage.

Greg Gualtieri
Designer

DS-500 Specifications

Format: API® 500 series standard, fully compatible

Input Impedance: 20K Ω , balanced

Output Impedance: less than 50 Ω

Gain: unity (0 dB)

Max. Output Level: +27dBu, balanced

Threshold: off to +30dB of detector gain

Detector: 11 center frequencies at 3.4, 4.5, 5.7, 6.6, 7.5, 8.0, 8.8, 9.4, 10.0, 10.5, and 11.5 kHz

Depth: continuously variable from -2 to -10 dB

Frequency Response: +/- 1 dB from 10Hz to 20kHz

Noise Level: better than 90 dB below +4dBu, 0-80kHz

Total Harmonic Distortion: less than 0.01%, 20-20kHz